



Powering Our Customers To Market Leadership

PNEUMATIC RUBBER FENDER

ENSURING VESSEL SAFETY AT BERTH

www.esl-eastafrica.com




PROPERTIES

- Product name: Pneumatic Rubber Fender
- Specs: diameter 3m X 5.5m Length.
- Internal pressure: 50KPa
- Tensile strength: 18.6Mpa
- Standard of production: ISO17357-1:2014
- Test certificate from origin country (China).
- Inspection report from DOSH Kenya

government approved inspector.

OVERVIEW

- Suitable for all types of vessels, from cargo ships to cruise ships, ferries and personal yachts.
- Prevent damage to vessels and berthing structures.
- Have high energy absorption and low reaction force.

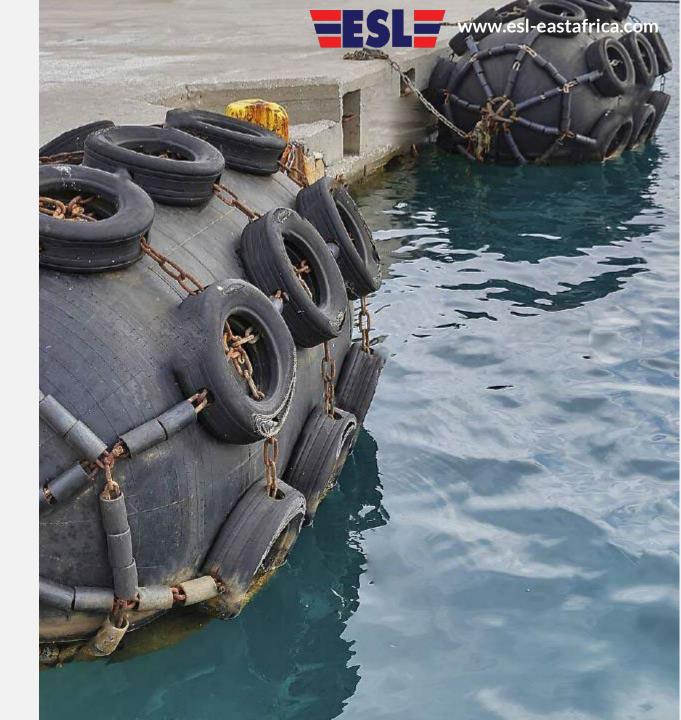

CONTACT

Express Shipping & Logistics (EA) Ltd 6th Floor, Cannon Towers II Bandari Wing P. O Box 1922 - Mombasa 80100, KENYA

Tel: +254 41 222 9784

+254 41 222 9786

+254 41 222 4822

+ 254 719 888 222

E-mail: agency@esl-eastafrica.com Web: http://www.esl-eastafrica.com

MEMBER



BIMCO MEMBER# : 129317

SINCE MAY 2002

